


This document contains proprietary information and may not be reproduced or copied without the express written permission of a duly authorised representative of MPD.

REV	DESCRIPTION	DSG	APR	DATE

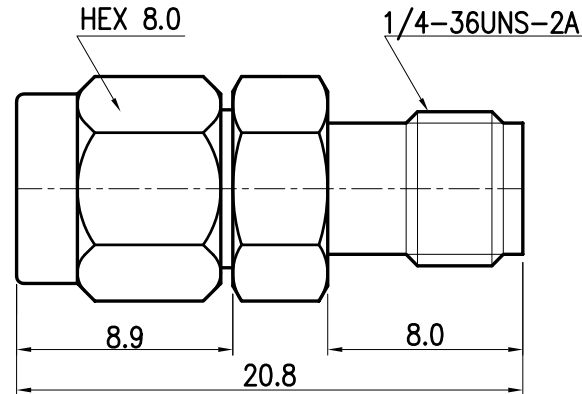

NOTE :

1. Material and Finish

Center contact : Beryllium copper / Gold

Body, Coupler Nut : ~~Stainless steel / Gold~~

Brass / Gold

Insulator : PTFE

2. Specification

Frequency range : DC ~ 18Ghz

VSWR : 1.25 : 1 Max

Operating Temperature : -40 ~ 120C°

2002/95/EC (RoHS) : Compliant

<small>UNLESS OTHERWISE SPECIFIED : ALL DIMS IN MILLIMETERS TOLERANCES ON DECIMALS 1 PLACE ±0.10 AGGLE ±1.0° 1.6a 2 PLACE ±0.05 REMOVE BURRS. BREAK SHARP EDGES</small>				THIRD ANGLE 		 MICROWAVE PASSIVE DEVICE		
DRAW	DESIGN	CHECK	APPRO.	TITLE				
<i>JM_PARK</i>	<i>WY_CHO</i>		<i>CU_LEE</i>	ADAPTOR 50 Ohms SMA JACK - SMA PLUG				
2007. 2. 1	2007. 2. 1		2007. 2. 1	SIZE		DWG NO.		REV
Material			SEE NOTE 1.	A4		A8003-111		A
Finish			SEE NOTE 1.	Scale : NS		Do Not Scale Drawing		1 of 1